

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECO-11-023039	21FEB12	KH	MS

**MATERIAL:**  
 HOUSING: NYLON, UL94V-0, BLACK.  
 TERMINALS: BRASS, BRIGHT TIN PLATED.  
 SCREWS: 6-32, STEEL, ZINC CHROMATE FINISH.

**ELECTRICAL:**  
 MAXIMUM CURRENT: 20A  
 OPERATING VOLTAGE: 600V  
 WIRE RANGE: 12-22 AWG

**ENVIRONMENT:**  
 OPERATING TEMP.: -60°C TO +105°C

1 ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS.

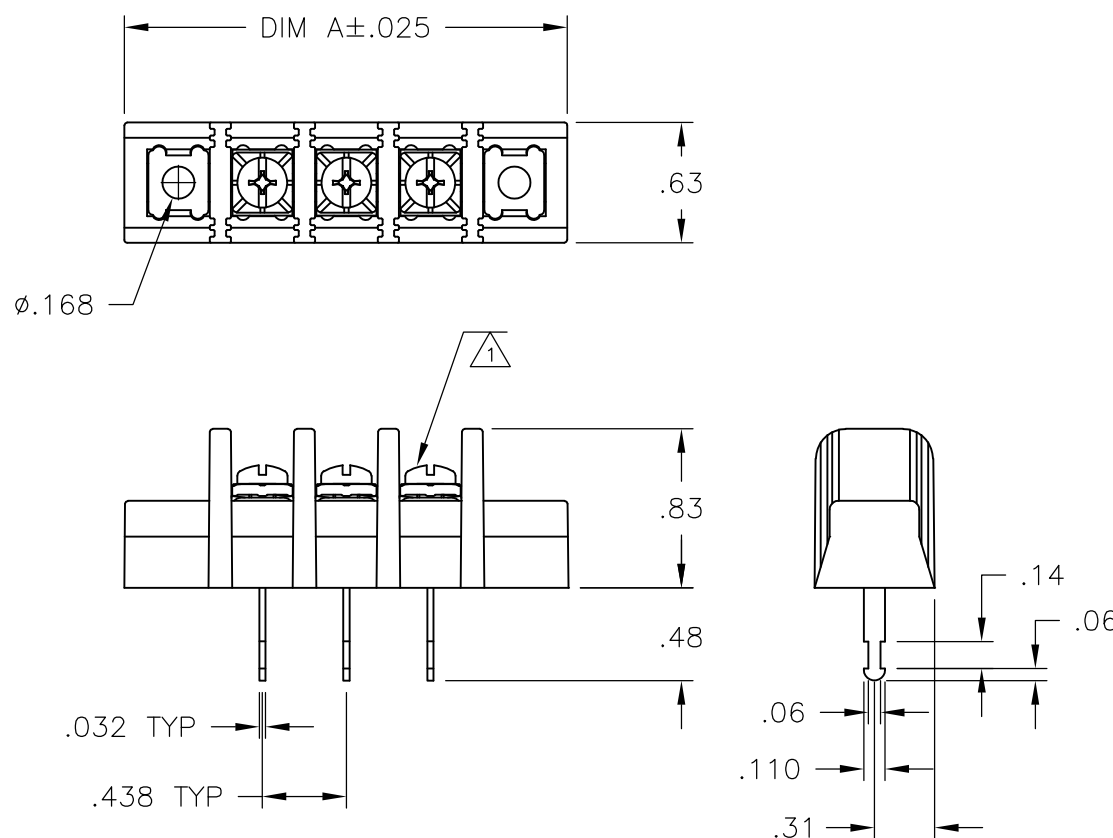

DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
11.937	25	SSB7FG250102	2-1546968-5
11.500	24	SSB7FG240102	2-1546968-4
11.062	23	SSB7FG230102	2-1546968-3
10.625	22	SSB7FG220102	2-1546968-2
10.187	21	SSB7FG210102	2-1546968-1
9.750	20	SSB7FG200102	2-1546968-0
9.312	19	SSB7FG190102	1-1546968-9
8.875	18	SSB7FG180102	1-1546968-8
8.437	17	SSB7FG170102	1-1546968-7
8.000	16	SSB7FG160102	1-1546968-6
7.562	15	SSB7FG150102	1-1546968-5
7.125	14	SSB7FG140102	1-1546968-4
6.687	13	SSB7FG130102	1-1546968-3
6.250	12	SSB7FG120102	1-1546968-2
5.812	11	SSB7FF110102	8-796602-7
5.812	11	SSB7FG110102	1-1546968-1
5.375	10	SSB7FG100102	1-1546968-0
4.937	9	SSB7FG090102	1546968-9
4.500	8	SSB7FG080102	1546968-8
4.062	7	SSB7FG070102	1546968-7
3.625	6	SSB7FG060102	1546968-6
3.187	5	SSB7FG050102	1546968-5
2.750	4	SSB7FG040102	9-796602-8
2.312	3	SSB7FG030102	1546968-3
1.875	2	SSB7FG020102	1546968-2
1.437	1	SSB7FG010102	1546968-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHL GEL 11/16/06	<b>STE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK S YODER 11/16/06		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S YODER 11/16/06	NAME SSB7FGXX0102	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± .02		SIZE	CAGE CODE	DRAWING NO
3 PLC ± .010		---	A3	00779
4 PLC ± -		WEIGHT	C-8-796602-7	
ANGLES ± 1°		RESTRICTED TO		
MATERIAL		-		
FINISH		-		
		CUSTOMER DRAWING		SCALE NTS SHEET 1 OF 1 REV B