


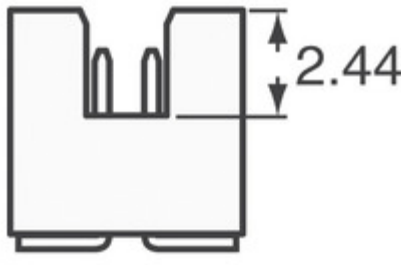






	<h2 style="color: #e67e22;">TFML-140-02-S-D-A</h2>	
	Manufacturer Part Number:	TFML-140-02-S-D-A
	Manufacturer/Brand:	Samtec, Inc.
	Part of Description:	.050 SHROUDED TERMINAL
	Datasheets:	1.TFML-140-02-S-D-A.pdf 2.TFML-140-02-S-D-A.pdf 3.TFML-140-02-S-D-A.pdf
	RoHs Status:	 Lead free / RoHS Compliant
	Stock Condition:	New original, 2659 pcs Stock Available.
	Ship From:	Hong Kong
	Shipment Way:	DHL/Fedex/TNT/UPS/EMS
<p>Image may be representation. See specs for product details.</p>		

Specifications

Part Number	TFML-140-02-S-D-A
Manufacturer	Samtec, Inc.
Description	.050 SHROUDED TERMINAL
Category	Connectors, Interconnects > Rectangular Connectors -
Part Status	2659 pcs Stock
Series	Tiger Eye™ TFML
Operating Temperature	-55°C ~ 125°C
Mounting Type	Surface Mount
Termination	Solder
Features	Board Guide
Style	Board to Board or Cable
Current Rating	-
Material Flammability Rating	UL94 V-0
Connector Type	Header
Number of Positions	80
Number of Rows	2
Fastening Type	Friction Lock
Voltage Rating	-
Ingress Protection	-
Applications	-
Contact Material	Phosphor Bronze
Number of Positions Loaded	All
Insulation Color	Black
Contact Type	Male Pin
Contact Shape	Square
Mated Stacking Heights	-
Pitch - Mating	0.050" (1.27mm)
Shrouding	Shrouded - 4 Wall
Row Spacing - Mating	0.050" (1.27mm)
Contact Length - Mating	0.134" (3.39mm)
Contact Length - Post	-
Overall Contact Length	-
Insulation Height	0.220" (5.60mm)
Contact Finish - Mating	Gold
Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Finish - Post	Tin
Insulation Material	Liquid Crystal Polymer (LCP)
Contact Finish Thickness - Post	-
Packaging	Tube

TFML-140-02-S-D-A is New Original in Stock, Search TFML-140-02-S-D-A Datasheets, PDF, Inventory at Y-IC.com Online, Order TFML-140-02-S-D-A Samtec, Inc. with warrantied and confidence. RFQ TFML-140-02-S-D-A : Info@Y-IC.com

You May Be Also Be interested In:

 <p>TFML-140-02-L-D-LC-P-TR Samtec, Inc. .050 SHROUDED TERMINAL</p>	 <p>TFML-140-02-L-D-P-TR Samtec, Inc. .050 SHROUDED TERMINAL</p>	 <p>TFML-140-02-S-D-A-P-TR Samtec, Inc. .050 SHROUDED TERMINAL</p>	 <p>TFML-140-02-S-D-A-TR Samtec, Inc. .050 SHROUDED TERMINAL</p>
 <p>TFML-140-02-S-D-A-K-TR Samtec, Inc. .050 SHROUDED TERMINAL</p>	 <p>TFML-140-02-S-D Samtec, Inc. CONN HEADER .05" 80POS DUAL SMD</p>	 <p>TFML-140-02-S-D-A-K Samtec, Inc. .050 SHROUDED TERMINAL</p>	 <p>TFML-140-02-L-D-SN Samtec, Inc. .050 SHROUDED TERMINAL</p>

Hot Parts

[More](#)

⌘ TFM201608GHM-R47MTAA	⚙ TFM201610A-1R0M-T00	D TFM201610A-1R5M-T00	➡ TFM201610A-2R2M-T00	➡ TFM201610A-2R2M-T10
⚙ TFM201610A-R40M-T00	⌘ TFM201610A-R47M-T00	⚙ TFM201610AHB-1R0M	➡ TFM201610ALM-1R0MTAA	➡ TFM201610ALM-2R2MTAA
D TFM201610ALM-R47MTAA	⚙ TFM201610ALMA1R5MTAA	⌘ TFM201610G-1R0M-T05	⚙ TFM201610G-1R0MTAA	➡ TFM201610G-2R2M-T05
➡ TFM201610G-2R2M-TAA	➡ TFM201610G-R24M-T05	⚙ TFM201610G-R47M-T05	⌘ TFM201610GHM-1R0MTAA	➡ TFM201610GHM-1R5MTAA
➡ TFM201610GHM-2R2MT01	➡ TFM201610GHM-2R2MTAA	D TFM201610GHM-R47MTAA	⚙ TFM201610GHM-R68MTAA	⌘ TFM201612ALM-R47MTAA
⚙ TFM252008ALM-1R0M	D TFM252008GHM-1R0MTAA	➡ TFM252010A-1R0M-T00	➡ TFM252010A-2R2M-T00	➡ TFM252010A-R47M-T00
⌘ TFM252010ALM-1R0MTAA	⚙ TFM252010G-1R0MTAA	➡ TFM252010G-2R2M	➡ TFM252010G-2R2M-T01	➡ TFM252010G-R47M
⚙ TFM252010G-R47MTAA	⌘ TFM252010GHM-1R0MTAA	⚙ TFM252010GHM-1R0MTAA	D TFM252010GHM-1R5MTAA	➡ TFM252010GHM-2R2M-T01
➡ TFM252010GHM-2R2MTAA	⚙ TFM252010GHM-2R2MTAA	⌘ TFM252010GHM-R47MTAA	⚙ TFM252010GHM-R47MTAA	➡ TFM252010MA-2R2M

Contact us:Info@Y-IC.com

ADD:Unit A5-B5 No.509, 5/F Sing Win Factory Building, 15-17 Shing yip St, Kwun Tong, Kowloon, HongKong.

Copyright © 2019 YIC International Co., Limited